



The **Complete** Grating and Handrail Supplier

Forge Welded Steel

Stair Treads

Handrails

Drainage Products

Service


Design & Layout



HK Metal Products

Established 1965

Pty Ltd

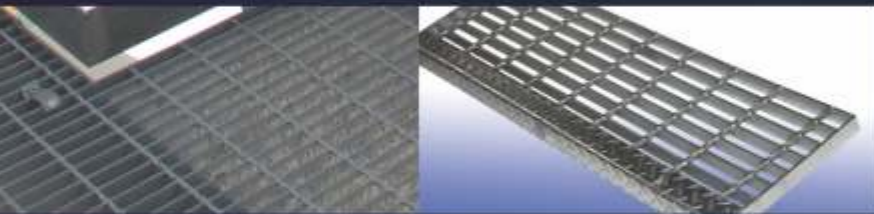

HK Metal Products Pty Ltd ABN 70 004 779 506

5 - 7 Tarnard Drive Braeside 3195 Victoria Australia

Tel: 61 3 9580 0146 Fax: 61 3 9580 6529

www.hkmetalproducts.com.au email: info@hkmetalproducts.com.au

The **Complete** Grating and Handrail Supplier

Design and Layout

HK Offer a complete layout service - from structural drawings or from your layout drawings



Comprehensive Design Service

All our finished products comply with Australian Standards



Our Mission:
 To be regarded as a competitive, quality-conscious and responsive national supplier of steel grating products, handrails and supporting services - design, selection advice and layout.

If you need more detailed information or advice please talk to one of our technical sales staff or visit our website: www.hkmetalproducts.com.au


Grating cut to any shape



Friendly Professional Service




Conveniently Packaged and Labelled

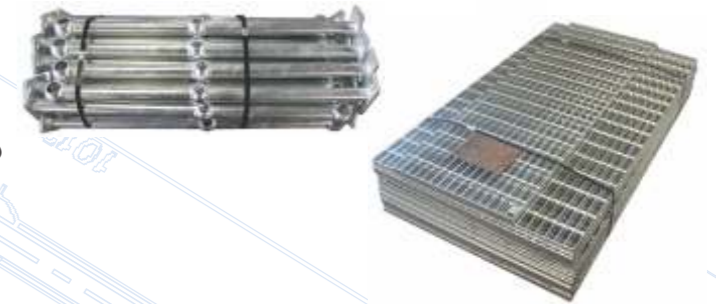

Convenience

Finished products ready for delivery - all panels are tagged for easy identification.

Handrail Accessories

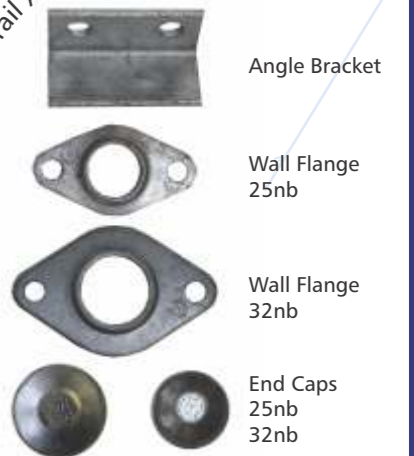

Tubular Handrail System


Contents:

1. Grating - General Specifications
2. Simplified Grating Selection Guide
3. Stair Treads
4. Accessories
5. Handrail - general specifications
- 6 Tubular handrail system




6. Tubular Handrail System


Tubular Stanchions

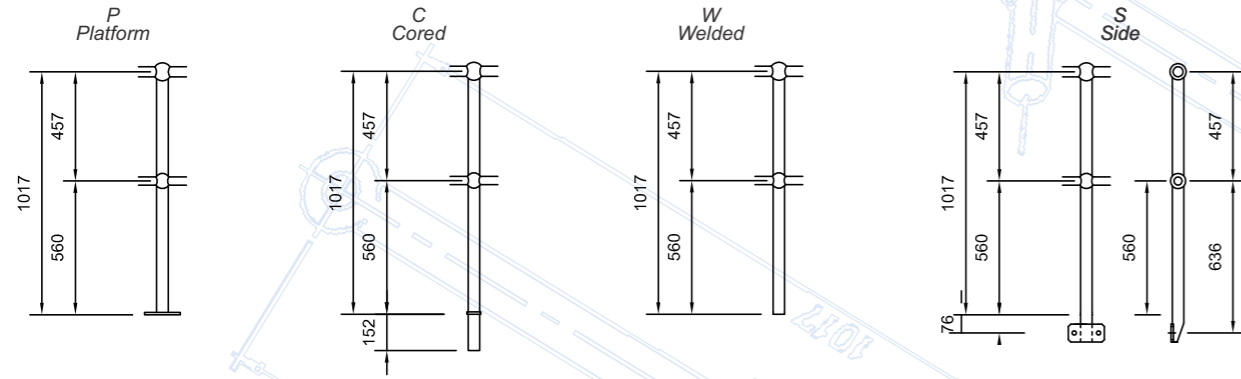


Tubular Stanchions

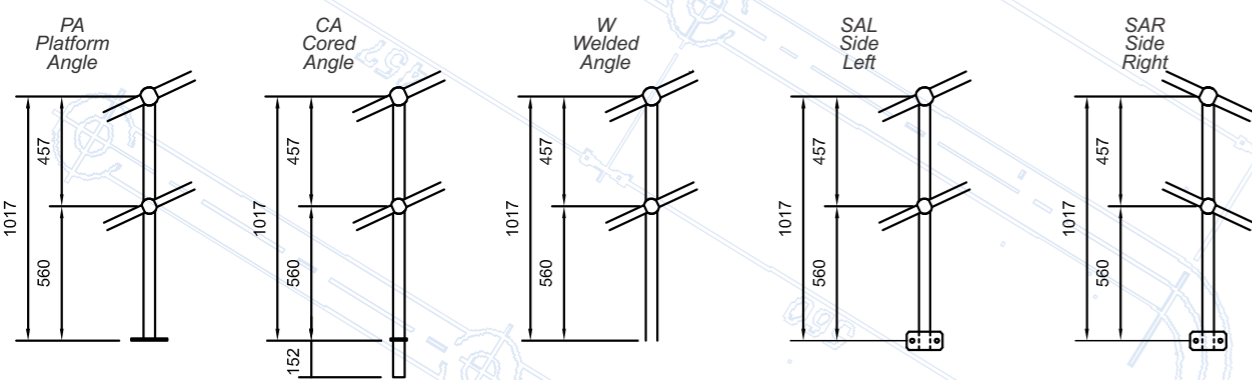


Bends and Closures

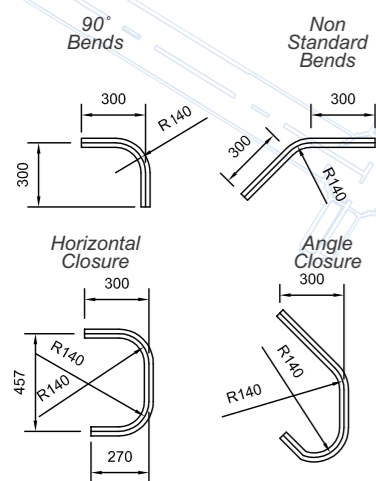


Two Hole Kick Plate Mounting Bracket Detail

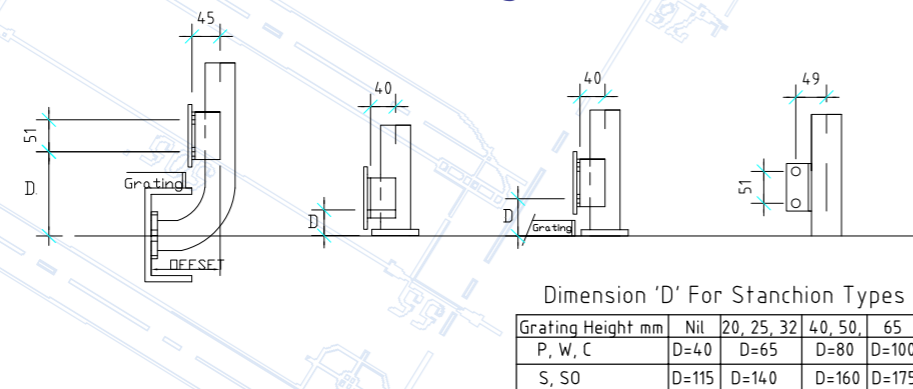

Slotted Kick Plate Mounting Bracket Detail

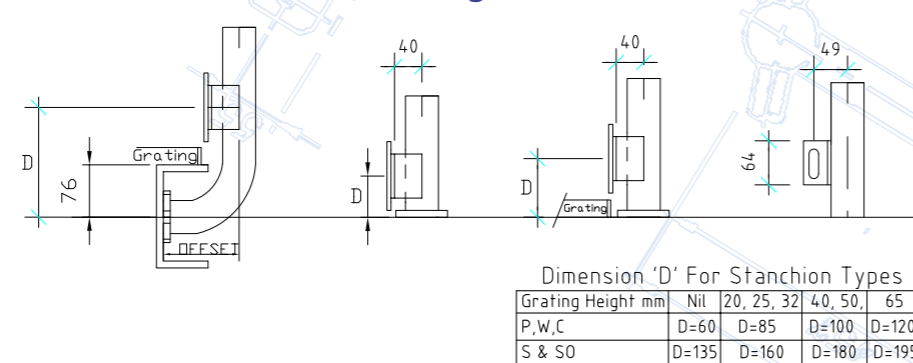

Base Plates

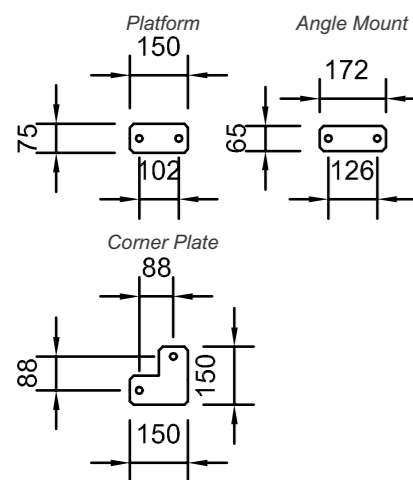

1. Grating - General Specifications

Stock Panel Sizes (Series 1 and Series 2)

Series 1	995 x 5800
Series 2	1005 x 5800

Surface Treatments

Standard	mill finish ('black')
Galvanised	to AS/NZS 4680:1999

Standard Manufacturing Tolerances (all dimensions in mm)

Overall dimensions and squareness	width, length and diagonal +0.00 -6.00
Transverse bow	±10.00 per 1000 width
Cross bar spacing	±6.00 end cross bars in 1500 length
Cross bar penetration	+2.0 - 0.0
Load bar lean	1/10
Longitudinal bow	1/200 length
Cross bar alignment	±5.00 from 90°
Transverse Bow	±5.00 from 90°

2. Simplified - Grating Load selection Guide

The following table provides a simple way of selecting grating for walkway applications.

For a given load bar size the maximum span specified is within the design parameters specified by AS 4300:1987 (5mm deflection at 4kPa uniformly distributed load).

Product Code	Load Bar size mm	Series 1 Steel		Series 2 Steel	
		Mass KG/m ²	Maximum Span	Mass KG/m ²	Maximum Span
HKF 203	20 x 3	19.5	1073	15.5	998
HKF 205	20 x 5	29.9	1219	23.4	1134
HKF 253	25 x 3	23.4	1268	18.5	1180
HKF 255	25 x 5	36.4	1441	28.3	1341
HKF 323	32 x 3	28.9	1526	22.6	1420
HKF 325	32 x 5	45.6	1734	35.2	1614
HKF 403	40 x 3	35.1	1804	27.3	1679
HKF 405	40 x 5	56.1	2050	43.0	1908
HKF 505	50 x 5	69.2	2424	52.8	2255
HKF 655	65 x 5	88.9	2951	67.6	2746

For more detailed information on safe loads and deflections for load bars please visit our website: www.hkmetalproducts.com.au


or contact our technical sales staff on +61 3 9580 0146



3. Steel Stair Treads

Steel	Maximum Span	
	Series 1	Series 2
Load Bar (mm)		
25 x 3	550	450
25 x 5	900	750
32 x 5	1300	1200


Bolted End Plate Detail

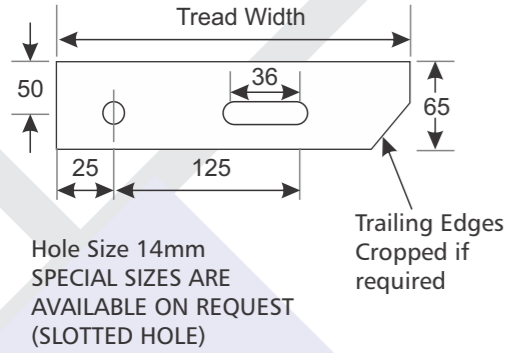


Standard Widths for Treads without Nosings							
Series 1	125	155	185	215	245	275	305
Series 2	125	165		205	245	285	325

Standard Widths for Treads with Nosings							
Series 1	125	155	185	215	245	275	305
Series 2	115	155		195	235	275	315


There are many variations of Design available which are not shown here, please advise us of your specific requirements when ordering

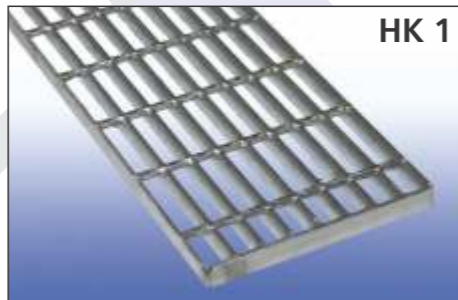


HK 1
WELDED fixing, banded ends, no nosing

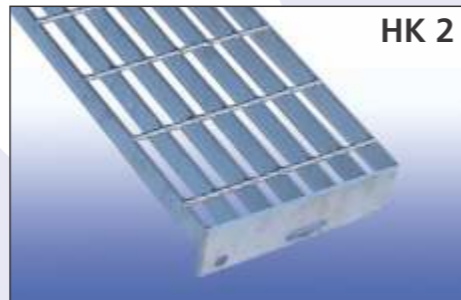

HK 2
BOLTED fixing, holed end plates, no nosing

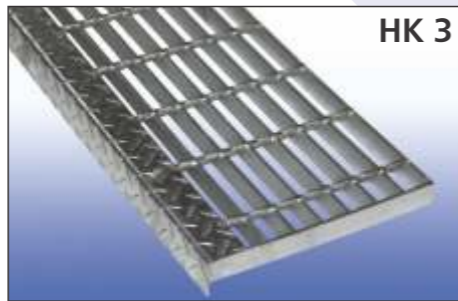


HK 3
WELDED fixing, banded ends, floor plate nosing

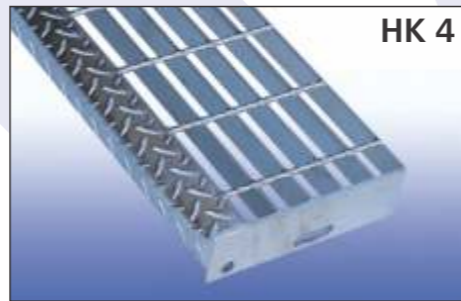


HK 4
BOLTED fixing, holed end plates, floor plate nosing




HK 5
WELDED fixing, banded ends abrasive nosing

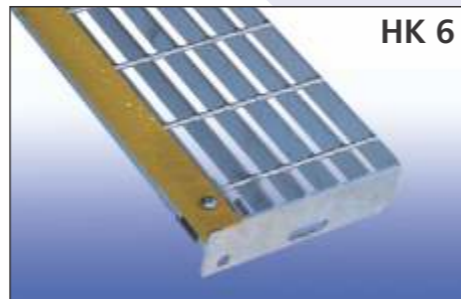

HK 6
BOLTED fixing, holed end plates, abrasive nosing

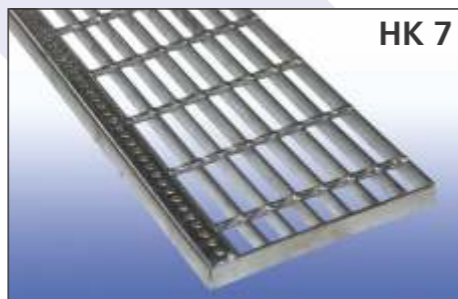

HK 7
WELDED fixing, banded ends, perforated plate nosing

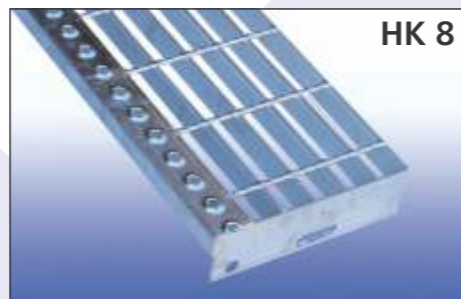

HK 8
WELDED fixing, holed end plates, perforated plate nosing



HK Metal Products Pty Ltd

4. Accessories


Fastening Clips



Universal Clip suits Series 1 and 2 with toe under steelwork

6. Tubular Handrail System

Tubular Stanchions

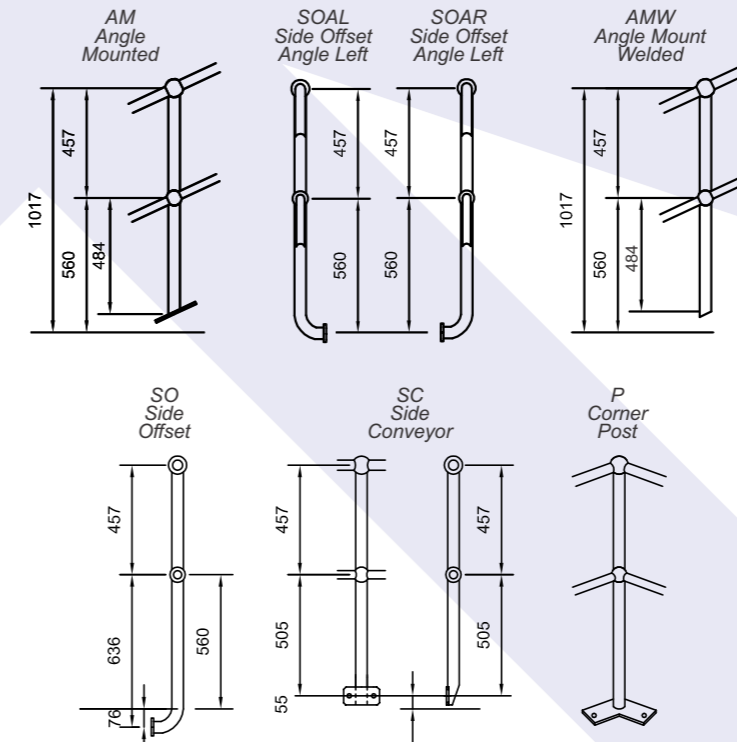

5. Handrail - General Specifications

Stanchions

Standard - 48.3 OD 40 NB gauge 3.2
Heavy Duty - 48.3 OD 40 NB gauge 4.0

Base Plates

Type AM Dimensions 65 x 172 x 10
Holes 17.5 @ 126 centres

All others Dimensions: 75 x 150 x 10
Holes 17.5 @ 102 centres

Kickplate Mounting Brackets

Dimensions 40 x 40 x 6 angle 76 long
14mm diameter holes @ 52 centres

Rail Specifications

Handrail 32NB (42.4 OD) Med Gauge
Kneerail 25NB (33.7 OD) Med Gauge

Finish

All standard handrail components are hot dipped galvanised to AS 4680 -1999. Stanchions are available in raw finish if required

Stanchion Spacing

HK Metals tubular handrail system is manufactured to comply with AS 1657 - 1985 which recommends a maximum spacing of 2 metres



HK Metal Products Pty Ltd